




STARLINK | STANDARD 4 SPECIFICATIONS

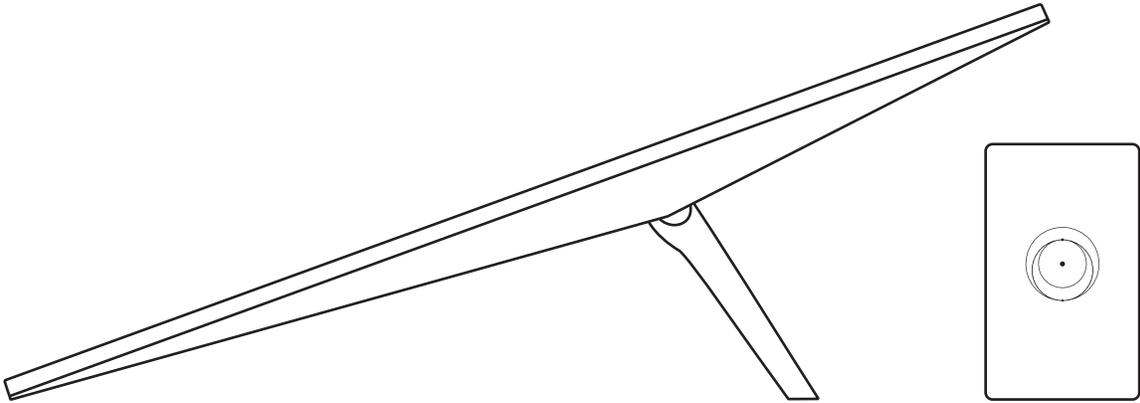


What's In The Box

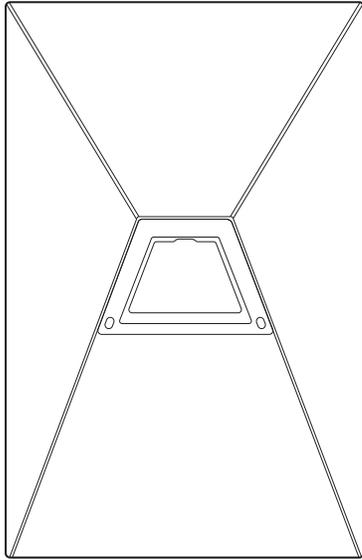

Standard

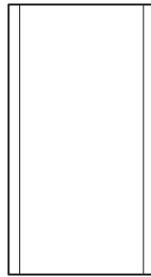


Power Supply




Router Mini




Router Mini Stand



Starlink Cable
15 m
(49.2 ft)




Starlink Ethernet Cable
2 m
(6.57 ft)





AC Cable
1.5 m
(4.92 ft)



Package Weight: 6.45 kg (14.22 lbs)


Package Dimensions: 652.4 x 451.7 x 97.9 mm (25.69 x 17.78 x 3.84 in)

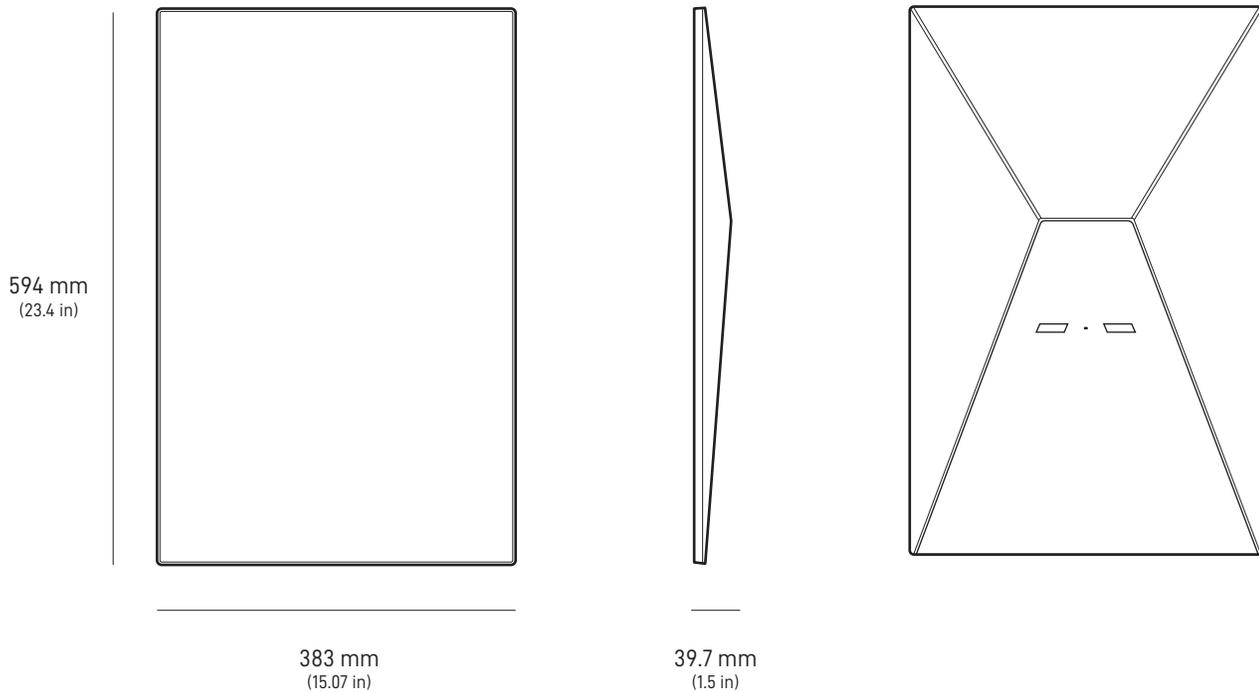


| | |
|------------------------------|--|
| Antenna | Electronic Phased Array |
| Field of View | 110° |
| Orientation | Software Assisted Manual Orienting |
| Weight | 2.9 kg (6.4 lb) 3.2 kg (7 lb) with Kickstand 3.8 kg (8.3 lb) with Kickstand & 15 m Cable |
| Environmental Rating | IP67 Type 4 |
| Operating Temperature | -30°C to 50°C (-22°F to 122°F) |
| Wind Speed | Operational: 96 kph+ (60 mph+) |
| Snow Melt Capability | Up to 40 mm / hour (1.5 in / hour) |
| Power Consumption | Average: 75 - 100 W |

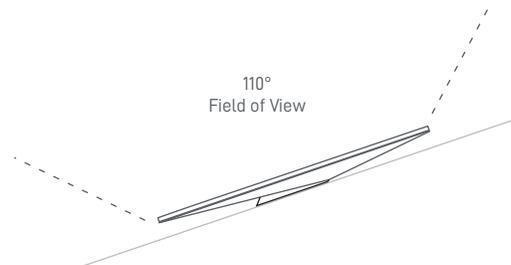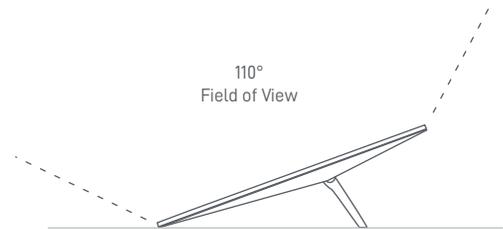

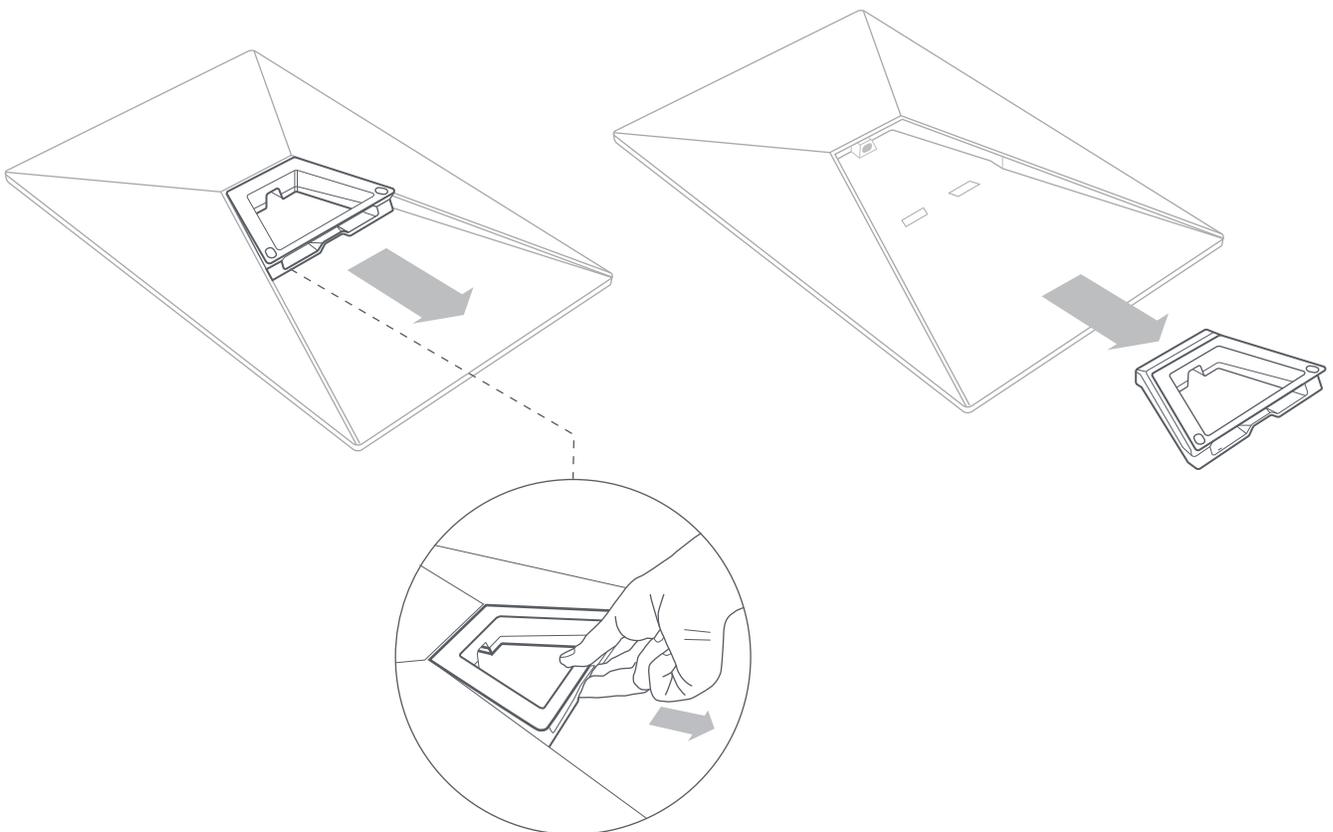
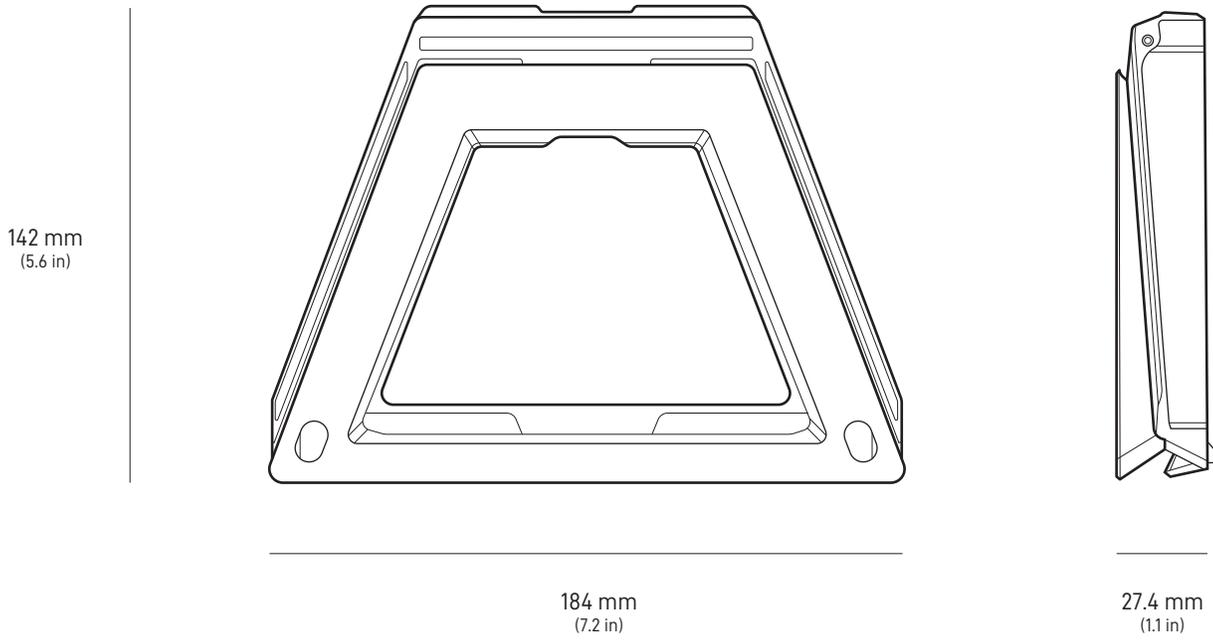


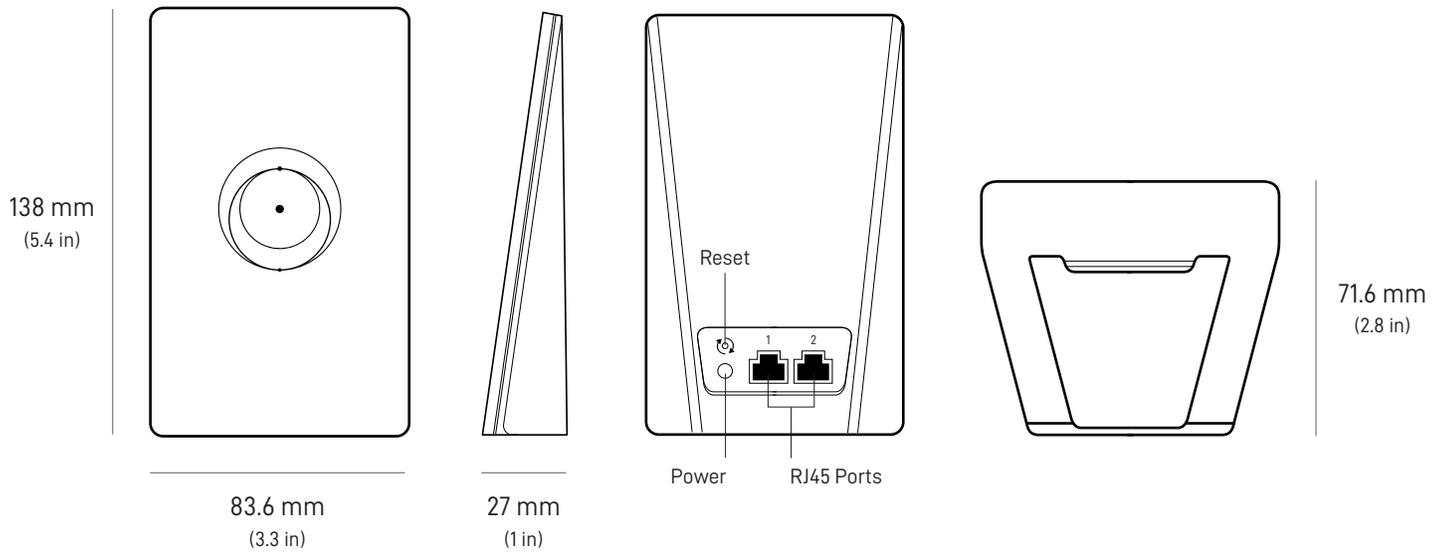

| | |
|------------------------------|--|
| Product Dimensions | 83.6mm x 138mm x 27mm (3.3in x 5.4in x 1in) |
| Wi-Fi Technology | IEEE 802.11a/b/g/n/ac/ax |
| Generation | WiFi 6 |
| Radio | Dual Band 2x2 MU-MIMO |
| Ethernet Ports | Two (2) Ports 1Gbps Ethernet (RJ-45 Port) |
| Coverage | Up to 120 m ² (1300 ft ²) |
| Operating Temperature | -30°C to 40°C -22°F to 122°F |
| Weight | 112g (0.25 lbs) |
| Security | WPA2 |
| Environmental Rating | Indoor |
| Power Indicator | LED face plate, lower left corner of router |
| Mesh Compatibility | Compatible with Starlink Gen 2, Gen 3, and Router Mini Mesh Nodes *Not compatible with 3rd party mesh systems |
| Devices | Connect up to 235 devices |

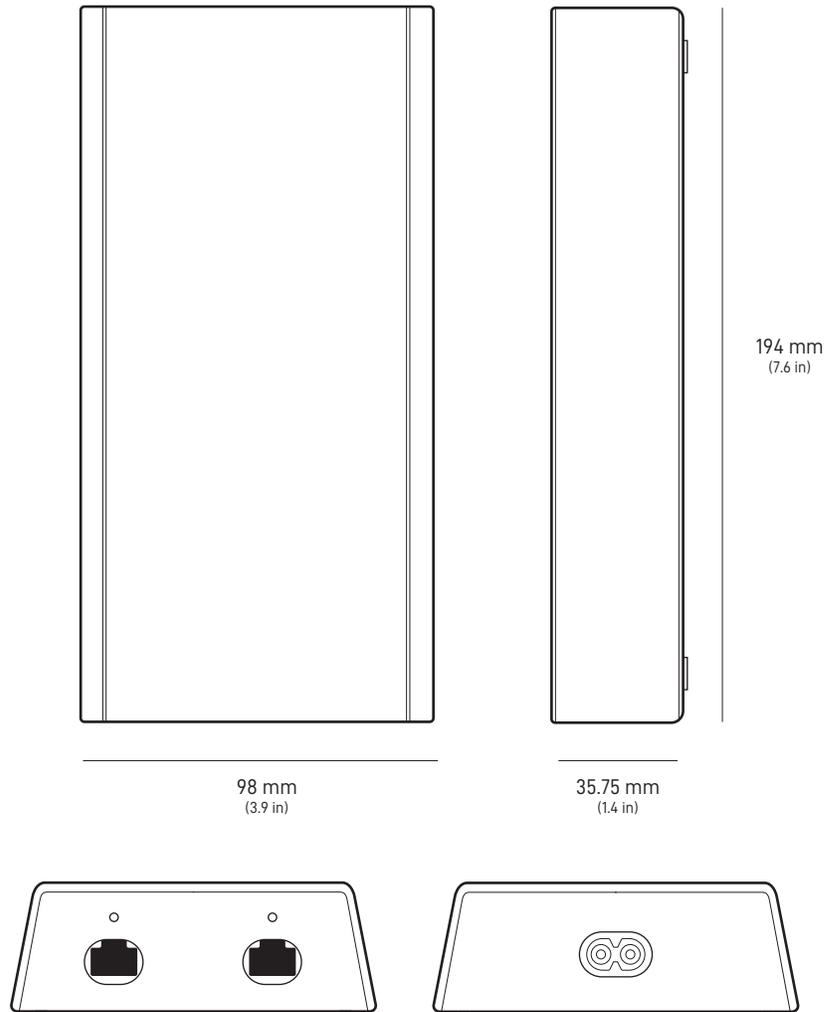

| | |
|------------------------------|--|
| Product Dimensions | 194 mm x 98 mm x 35.75 mm (7.6 in x 3.9 in x 1.4 in) |
| Weight | 0.65 kg (1.4 lbs) |
| Environmental Rating | IP66 Type 4 |
| Operating Temperature | -30°C to 50°C (-22°F to 122°F) |
| Power Specifications | 100 - 240V ~ 2.5A 50 - 60 Hz |

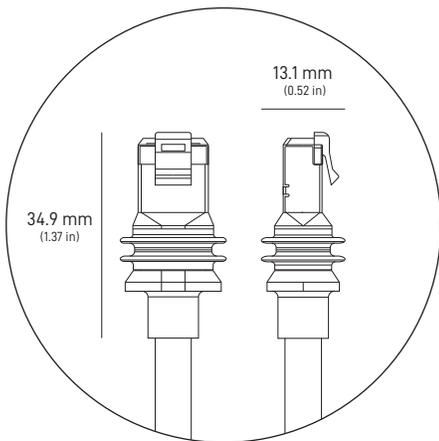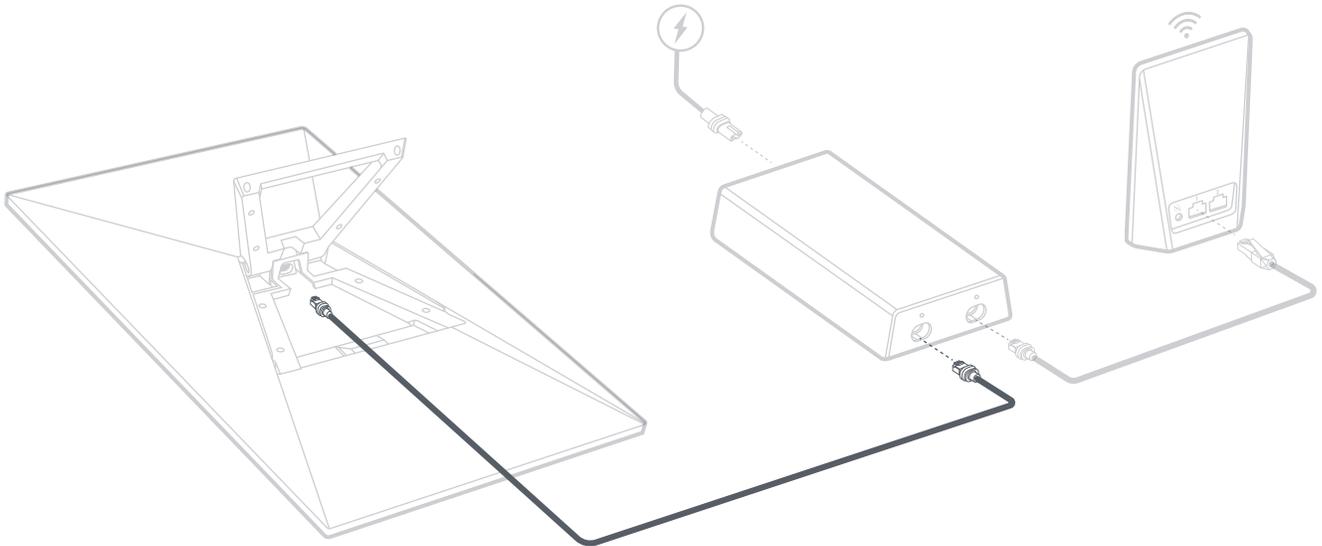

| Pin 1 | Wire Color | Pin 2 |
|--------|-------------------|--------|
| Shield | Drain - Bare Wire | Shield |
| 8 | Brown | 8 |
| 7 | White / Brown | 7 |
| 6 | Green | 6 |
| 5 | White / Blue | 5 |
| 4 | Blue | 4 |
| 3 | White / Green | 3 |
| 2 | Orange | 2 |
| 1 | White / Orange | 1 |

