

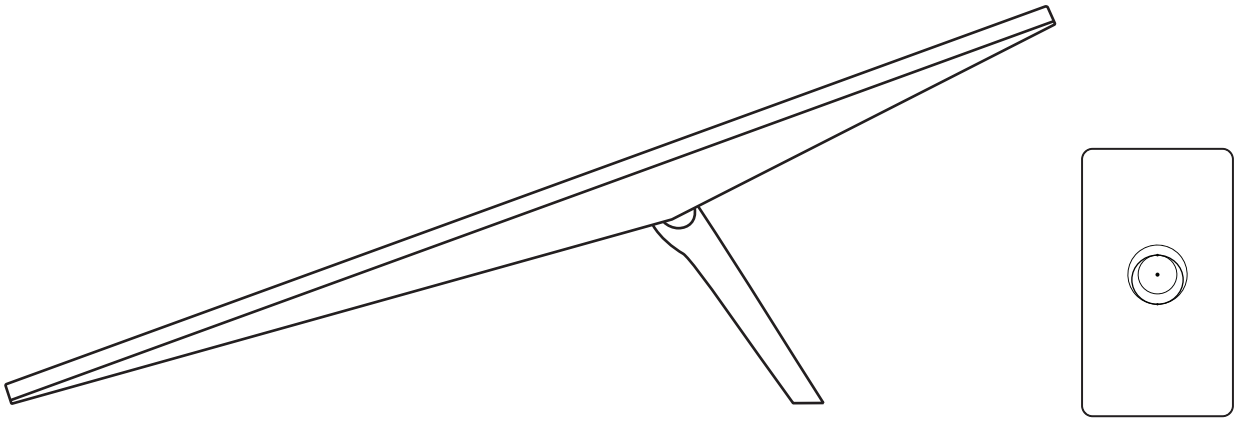



What's In The Box

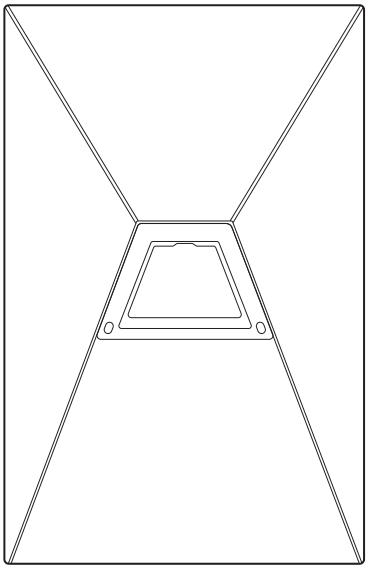


Standard



Power Supply




Router 4



Ⓐ

15 m Starlink Cable


15 m
(49.2 ft)



Ⓑ

2m Starlink Cable

2 m
(6.57 ft)




Ⓒ

AC Power Cable


1.5 m
(4.92 ft)


Package Weight: 6.45 kg | 14.22 lbs


Package Dimensions: 652.4 x 451.7 x 97.9 mm | 25.69 x 17.78 x 3.84 in

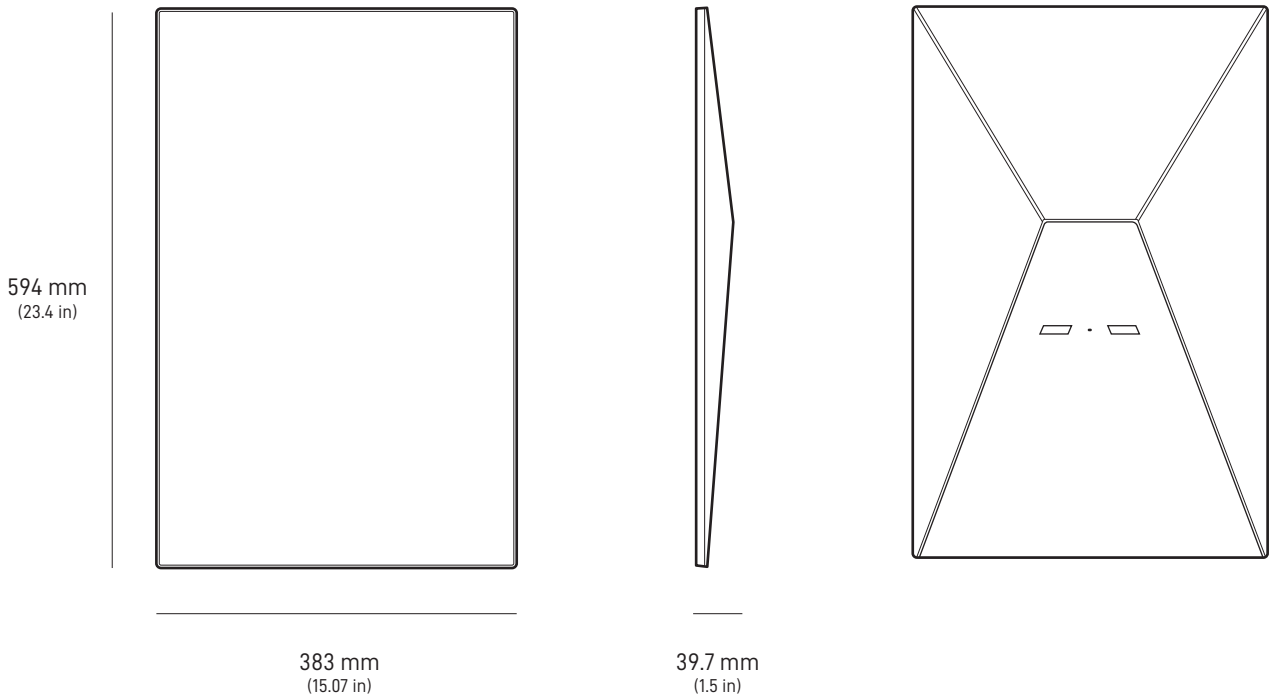


Antenna	Electronic Phased Array
Field of View	110°
Orientation	Software Assisted Manual Orienting
Weight	2.9 kg | 6.4 lb 3.2 kg | 7 lb with Kickstand 3.8 kg | 8.3 lb with Kickstand & 15 m Cable
Environmental Rating	IP67 Type 4
Operating Temperature	-30°C to 50°C | -22°F to 122°F
Wind Speed	Operational: 96 kph+ | 60 mph+
Snow Melt Capability	Up to 40 mm / hour | 1.5 in / hour
Power Consumption	Average: 75 - 100 W

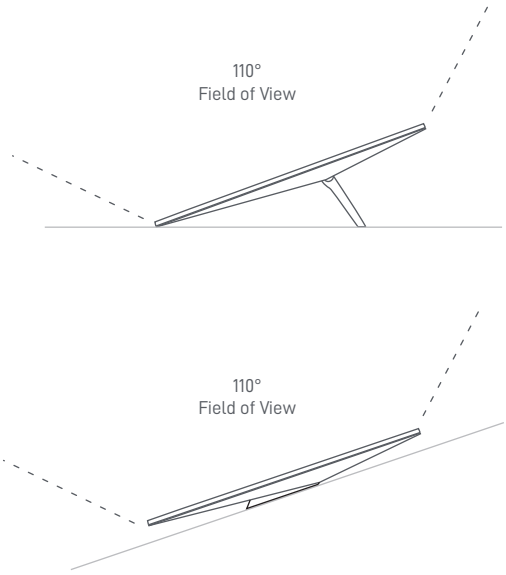


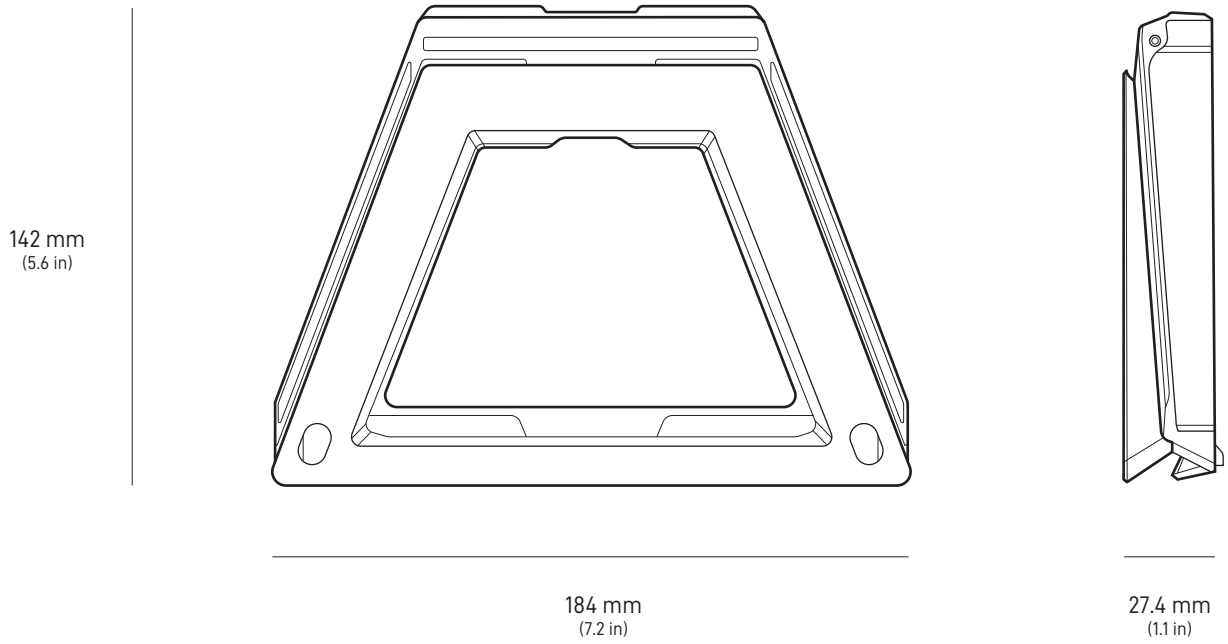
142 mm
(5.6 in)
184 mm
(7.2 in)
27.4 mm
(1.1 in)

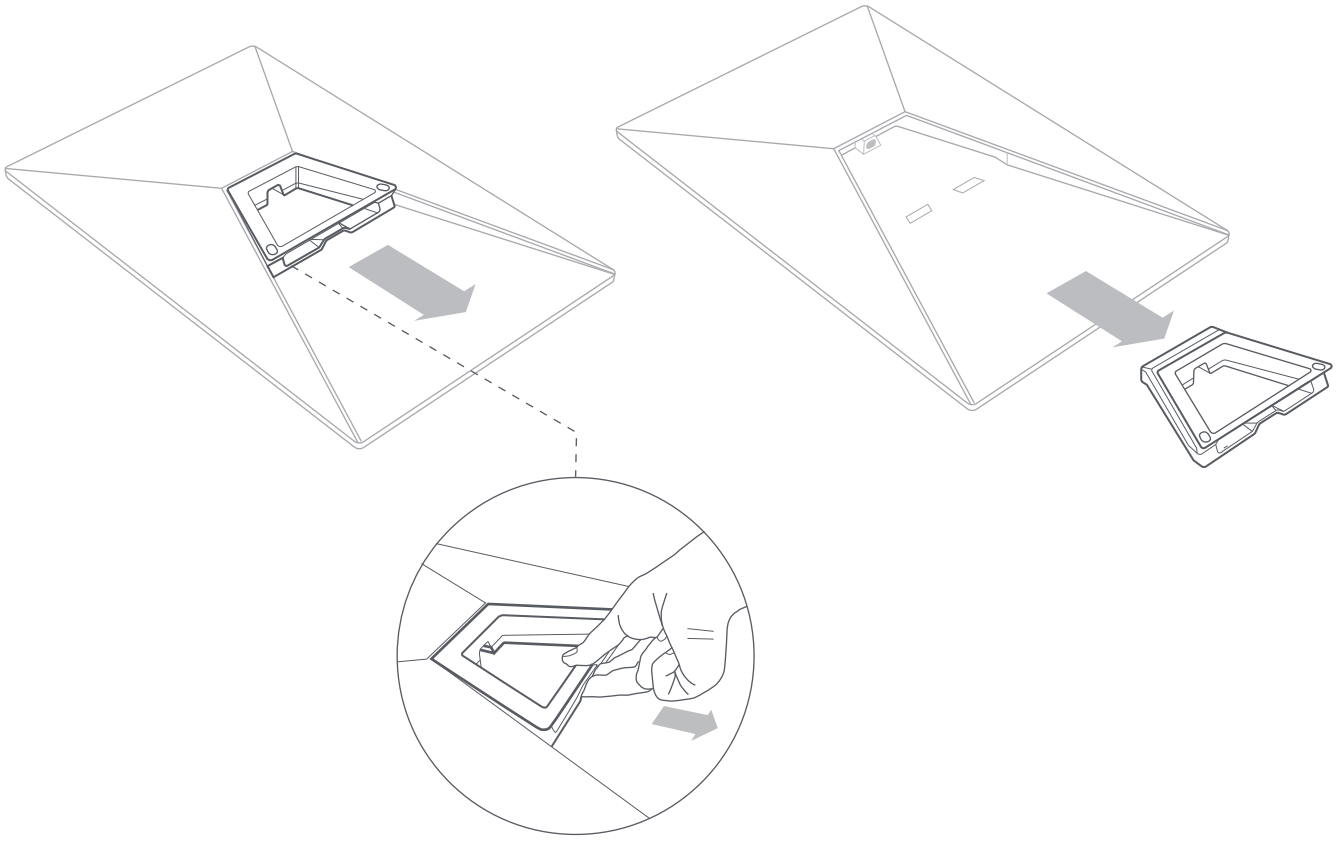


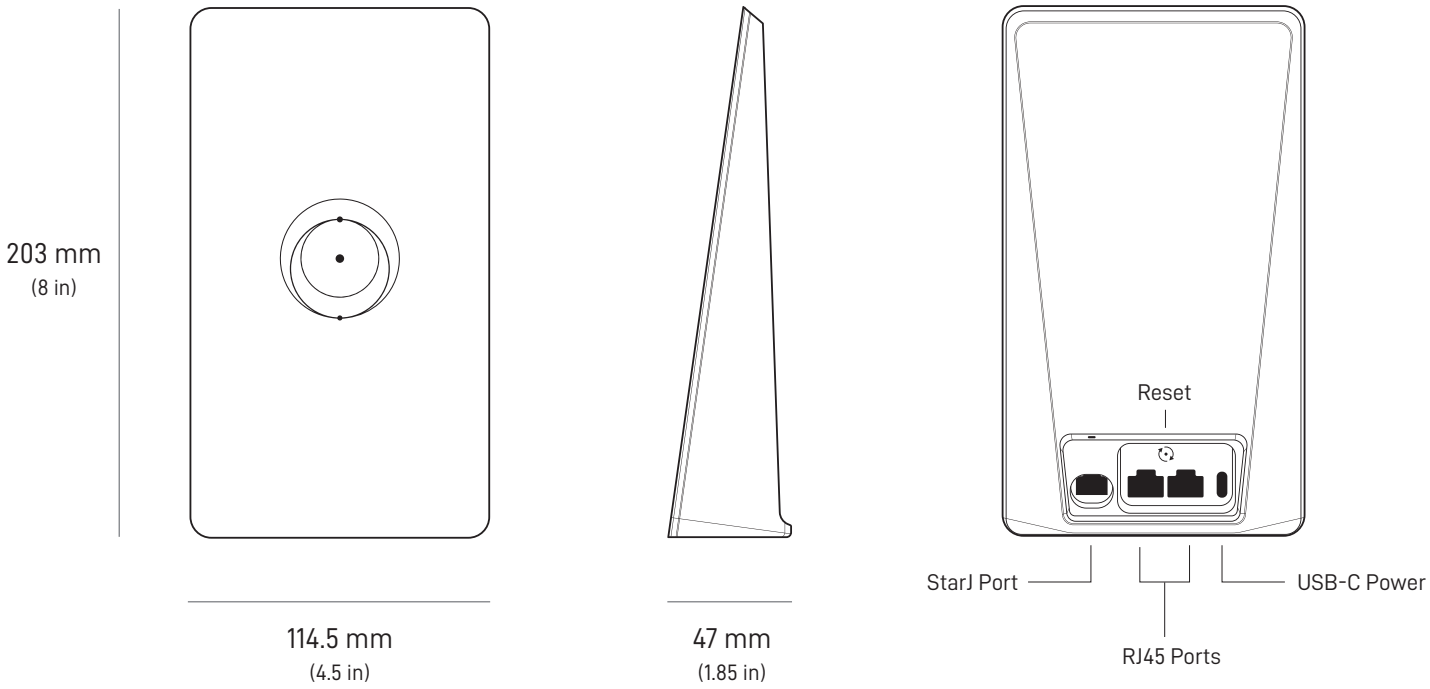


Product Dimensions	46 mm × 203 mm × 115 mm | 1.8 in × 8.00 in × 4.5 in
Wi-Fi Technology	802.11 a/b/g/n/ac/ax/be
Generation	WiFi 7
Radio	4×5 5 GHz | 4×4 2.4 GHz
Ethernet Ports	Two Latching Ports (RJ45) with Removable Cover
Coverage	Up to 325 m^2 | 3,500 ft^2
Operating Temperature	-30°C to 40°C | -22°F to 122°F
Weight	0.4 kg | 0.9 lbs
Security	WPA2, WPA3
Environmental	Meets IP56 Requirements, Configured for Indoor Use
Power Indicator	LED | Front Face, Centered Low
Mesh Compatibility	Compatible with Starlink Gen 2, Gen 3, and Router Mini Mesh Nodes *Not compatible with 3rd party mesh systems
Devices	Connect up to 510 devices

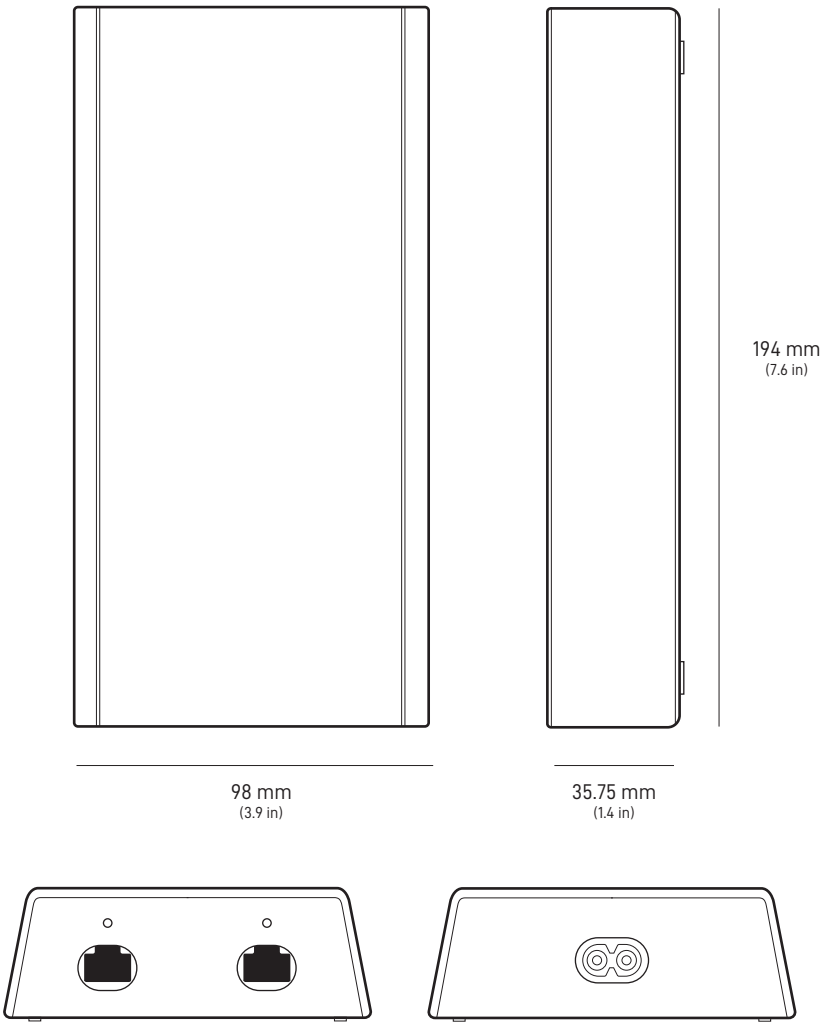



Product Dimensions	194 mm x 98 mm x 35.75 mm | 7.6 in x 3.9 in x 1.4 in
Weight	0.65 kg | 1.4 lbs
Environmental Rating	IP66 Type 4
Operating Temperature	-30°C to 50°C | -22°F to 122°F
Power Specifications	100 - 240V ~ 2.5A 50 - 60 Hz

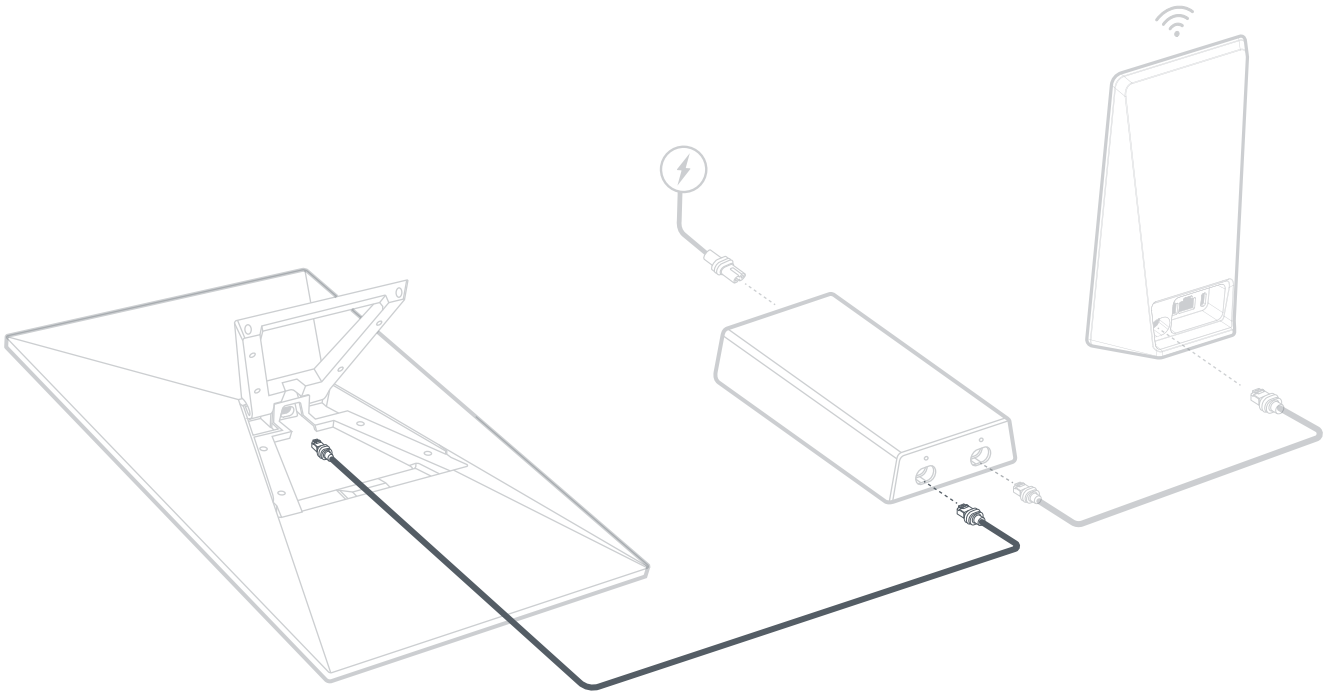


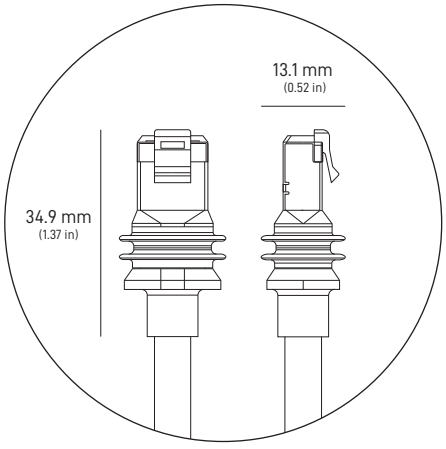



Pin 1	Wire Color	Pin 2
Shield	Drain - Bare Wire	Shield
8	Brown	8
7	White / Brown	7
6	Green	6
5	White / Blue	5
4	Blue	4
3	White / Green	3
2	Orange	2
1	White / Orange	1

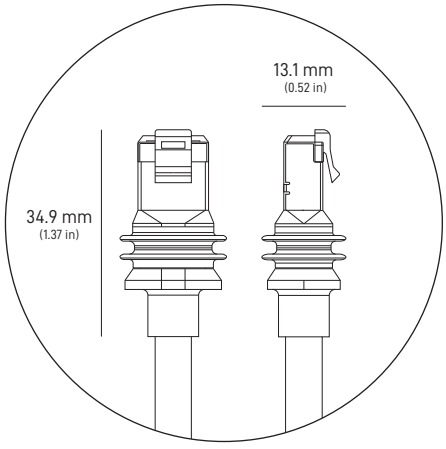


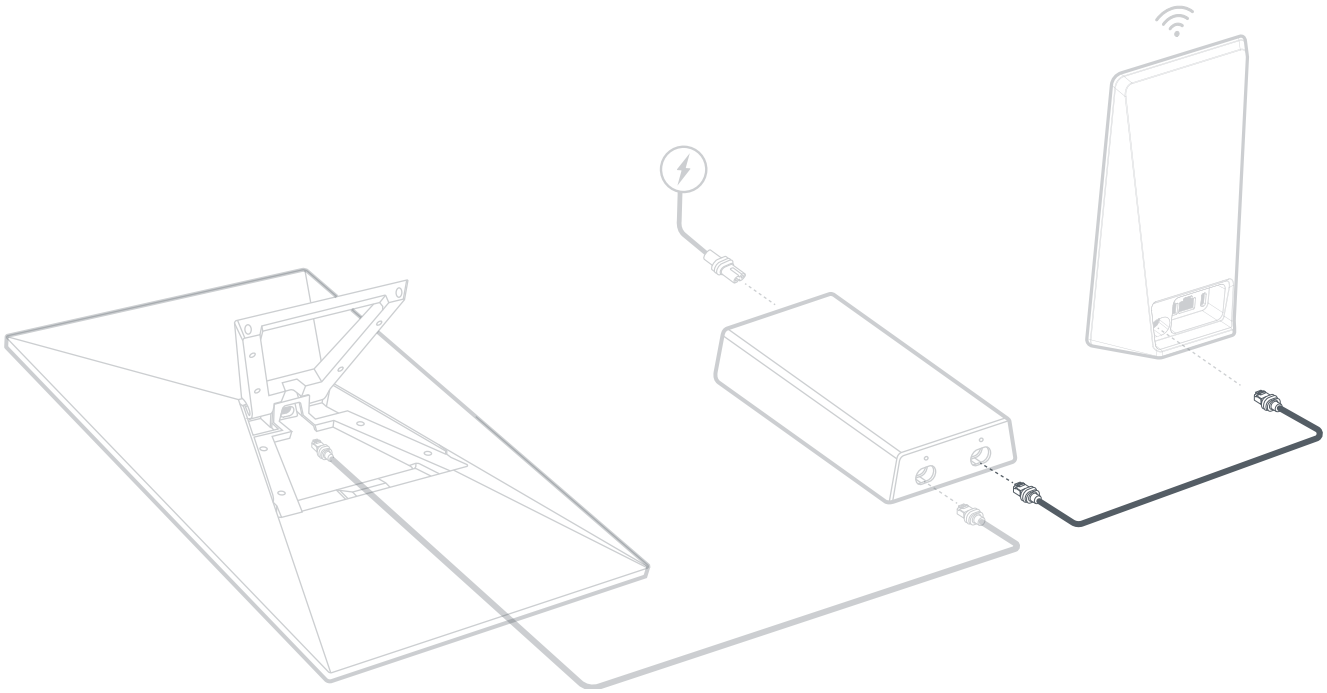

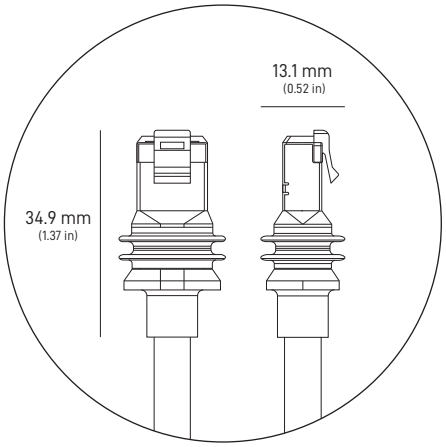
13.1 mm
(0.52 in)
34.9 mm
(1.37 in)

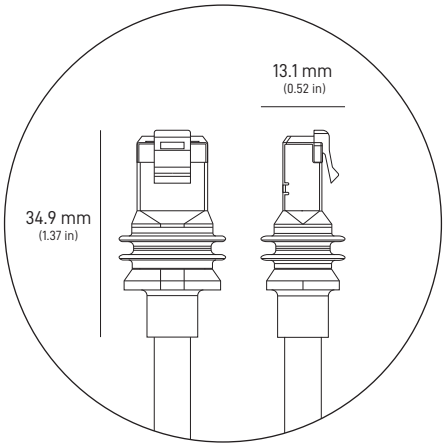
13.1 mm
(0.52 in)
34.9 mm
(1.37 in)

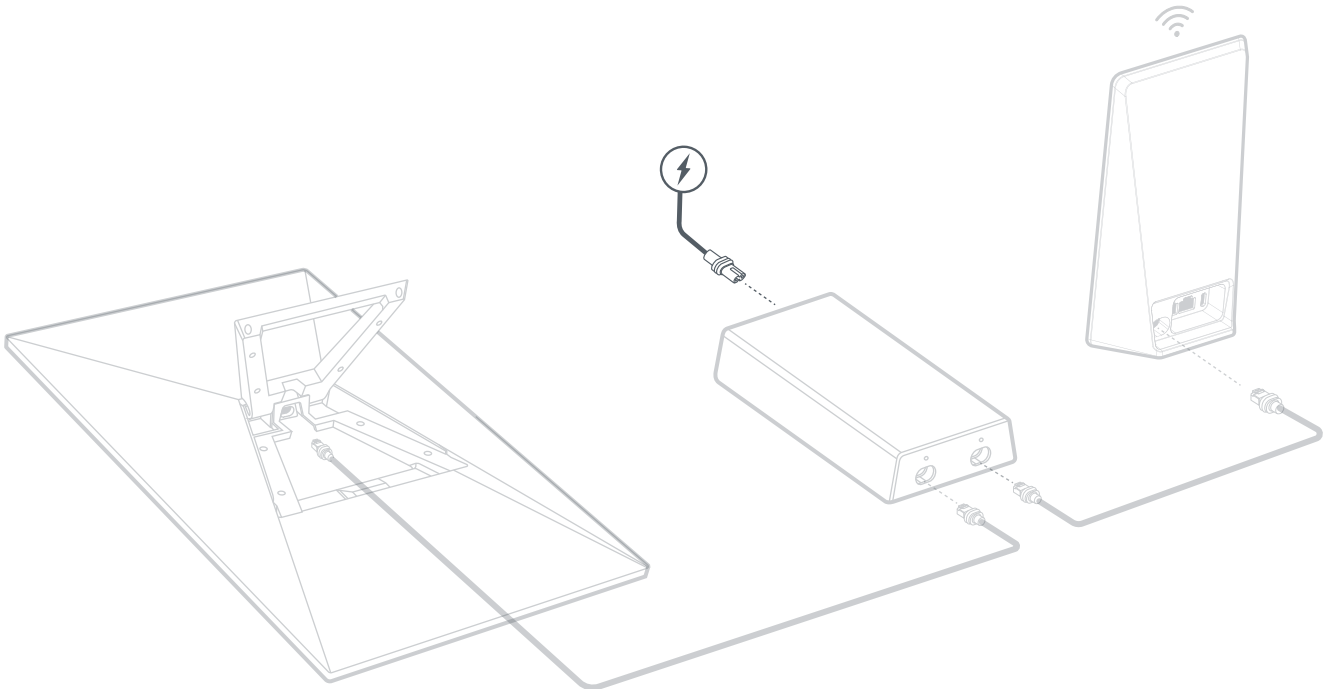

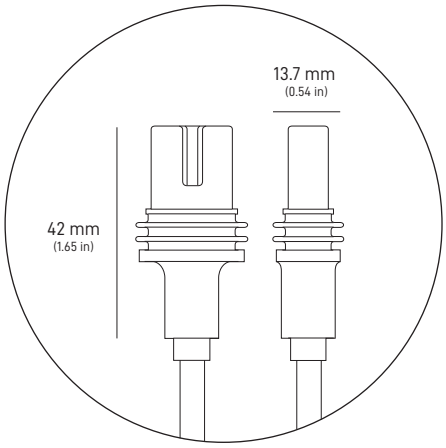
13.7 mm
(0.54 in)
42 mm
(1.65 in)